



STUDS AT 400crs

(A) NOTE: SHEET JOINTS AROUND JOINERY OPENINGS ARE GLUED FOR STABILITY.

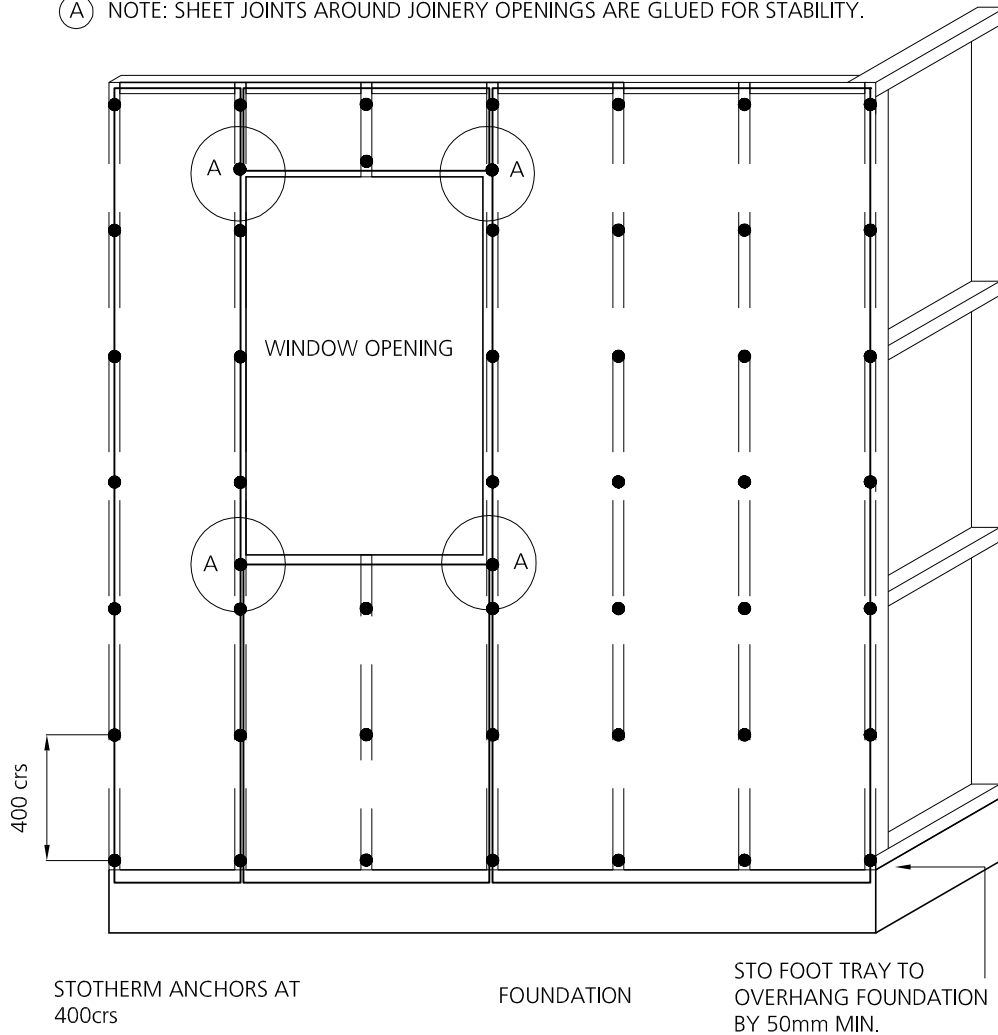

COUNTERSUNK FIXINGS:
STOTHERM INSULATION SYSTEM USING STOTHERM ANCHORS WITH ST INSULATING CAP ELIMINATES THERMAL BRIDGING SPOTS

NOTE:
IF FRAMING AT 600crs
INSTALL STOTHERM ANCHORS AT 300crs

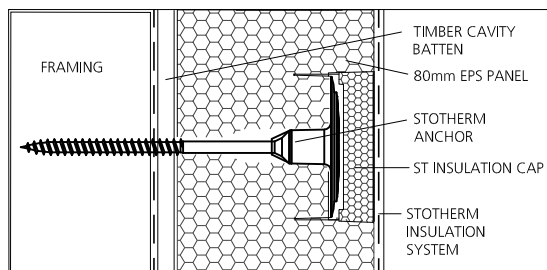

STOTHERM PLASTER SYSTEM	STOTHERM INSULATION TYPICAL EPS SHEET & FIXING LAYOUT	STI-102
		JULY 2010

The information contained in this detail is based on our experience and testing and represents the latest information available at the date of issue. This detail is intended for use by the design professional and users of Sto products to assist in developing specific project details to be used in conjunction with a Sto Specification. We reserve the right to alter or update information at any time without prior notice & it is the responsibility of the specifier and/or the project manager to insure that they have the current Sto details and specifications.