


ALL EDGES MUST BE
SUPPORTED WITH H3.1 CAVITY
BATTENS ON TIMBER FRAMING.
ALL SHEETS FIXED VERTICALLY

CAVITY BATTEN LAYOUT AND
FIXINGS AS PER
MANUFACTURERS DETAILS AND
WIND ZONES

FIXINGS MIN.12mm FROM SHEET
EDGES 1-2mm GAP IN SHEETS

BACK PRIME ANY AREAS
SUBJECT TO MOISTURE

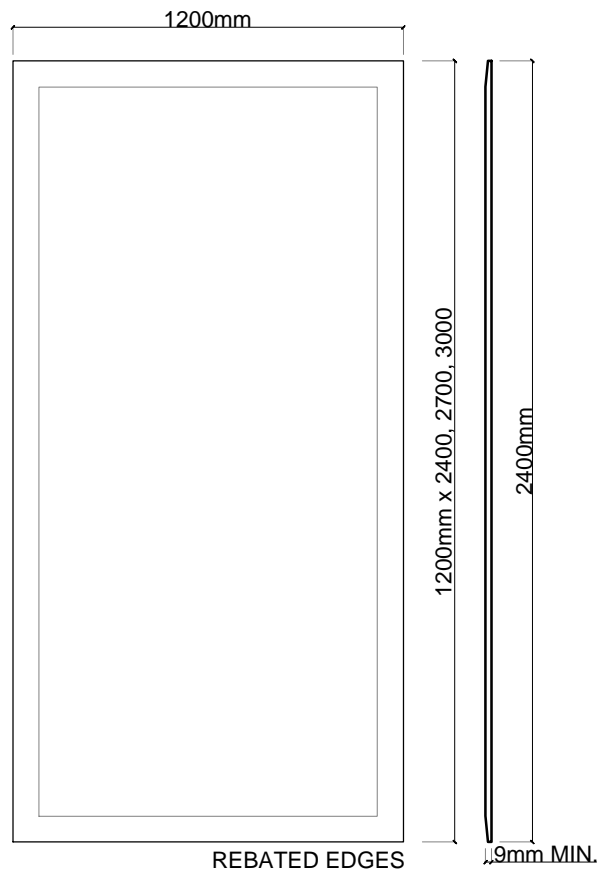

SCALE NTS

STO/ VENTCLAD	STOARMAT CONSTRUCTION SYSTEM FIBRE CEMENT SHEET INFORMATION	VFCS 006
		2014

The information contained in this detail is based on our experience and testing and represents the latest information available at the date of issue. This detail is intended for use by the design professional and users of Sto products to assist in developing specific project details to be used in conjunction with a Sto Specification. We reserve the right to alter or update information at any time without prior notice & it is the responsibility of the specifier and/or the project manager to insure that they have the current Sto details and specifications.