


PROVIDE SEPARATION (ROOF UNDERLAY) UNDER METAL CAPPING AND 15mm H3 PLY - PACKED TO A FALL PRE FINISHED METAL CAPPING TO PARAPET WITH 5° MIN.FALL

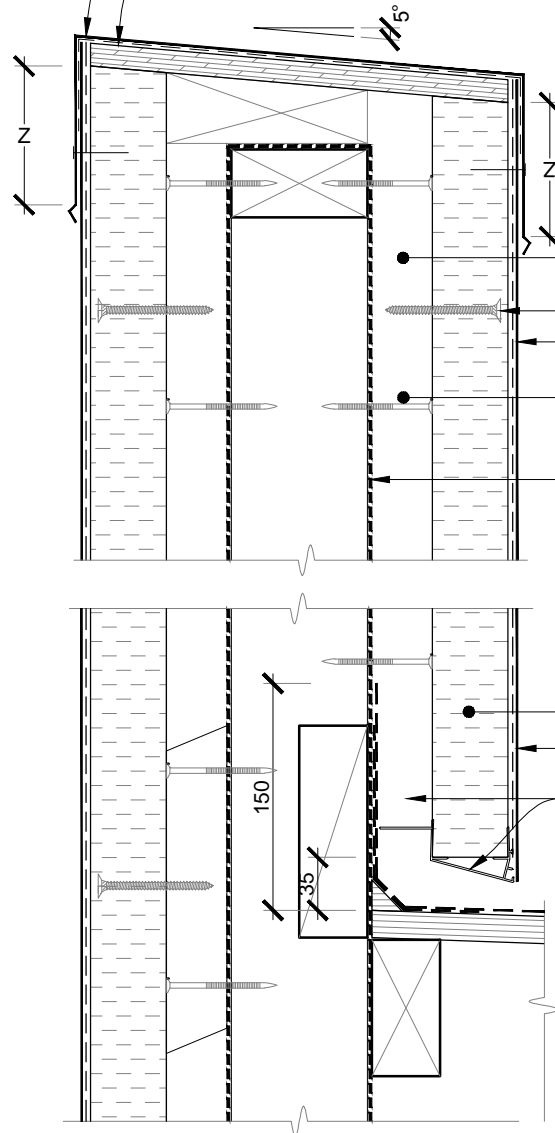

REFER TABLE 7 - E2/AS1

40mm DRAINED CAVITY
 POREN FIXING
 CARRY MESH/PLASTER UP TO TOP EDGE
 H3.1 CAVITY SPACER or 40mm CAVITY BATTEN
 WALL UNDERLAY CONTINUOUS OVER TOP OF WALL FRAME

BALUSTRADE 1000M MIN.HEIGHT FROM DECK

POREN PANEL
 STO POREN PLASTER SYSTEM
 STO uPVC VENTED BASE CAP WITH EXTENSION INSERT

NOTE:
 H3.1 CAVITY SPACERS DETAILED ALTERNATIVELY -
 USE 120mm POREN FIXINGS or 40mm CAVITY BATTENS @ 300mm CTRS

STO POREN SYSTEM	STO POREN PANEL (40mm cavity) SYSTEM	PP 1018
	PARAPET/BALUSTRADE DETAIL - METAL CAP	2014

The information contained in this detail is based on our experience and testing and represents the latest information available at the date of issue. This detail is intended for use by the design professional and users of Sto products to assist in developing specific project details to be used in conjunction with a Sto Specification. We reserve the right to alter or update information at any time without prior notice & it is the responsibility of the specifier and/or the project manager to insure that they have the current Sto details and specifications.